


**IP3330-2406 Product Specification**

Product Name		Factory Part No.	Customer Part No.
IP-PDU2017		IP3330-2406	
Main Function		Description	
Monitor		Total load current per phase	
		Input Voltage	
		Total power(kW) per phase	
		Total energy consumption(kWh) per phase	
		Temperature/humidity sensor status (1 T/H sensor port)	
Configure		Set the email alarm address	
		Set the threshold of total load current per phase	
		Set the threshold of voltage	
		Set HTTP	
		Set SNMP(v1)	
		Set network parameters(IP, gateway, subnet mask, DNS)	
Alarm	User defined	Threshold of total current is exceeded per phase	
		Threshold of voltage is exceeded	
	System default	When overload occurs	
		Buzzer beeping	
	Alarm method	Send E-mail to administrator automatically	
		SNMP sends trap alarm information	
Central management		Support central management of N units via CLEVER Manager software	
User Management		Single user, user name and password configurable	
Accessing method		Web based, access via IP	
		SNMP v1	
		Telnet	
Daisy chain		Support daisy chain (1 Master, Max. 4 Slaves)	
Software system		Support web browsers like IE, Firefox, and Google etc.	
Input/output			
Input		Rated input voltage	380VAC~50/60 Hz
		Input terminal type	IEC 60309 32A (3P+N+E) plug



	Cable specification		5×6.0mm ²			
	Cable length		3M			
	Rated current		3x32A			
	Overload protector		16A overload and indicator 6pcs			
Output	Outlet standard	IEC 320 C19 color sockets	Rated current	16A	Outlet quantity	6
	Outlet standard	IEC 320 C13 with anti-fall color sockets	Rated current	10A	Outlet quantity	24
	Rated output voltage		230VAC			
	Rated current		16A			
	Display		LCD, display input voltage, total current, total power(kW), energy consumption(kWh) and IP			
Physical characteristics	Dimension		L×W×H = 1799.5×56×44.4mm			
	Case material		Aluminum			
	Case color		Black			
Environment characteristics	Working environment		Temperature: 0-50° C, relative humidity 0-95%			
	Storage environment		Temperature:-10-60° C, relative humidity 0-95%			
Installation	Both sides brackets installation					
	Toll-less mounting (optional)					
Design: Linda		Customer confirm:		Check:		Authorized:

PDU drawing

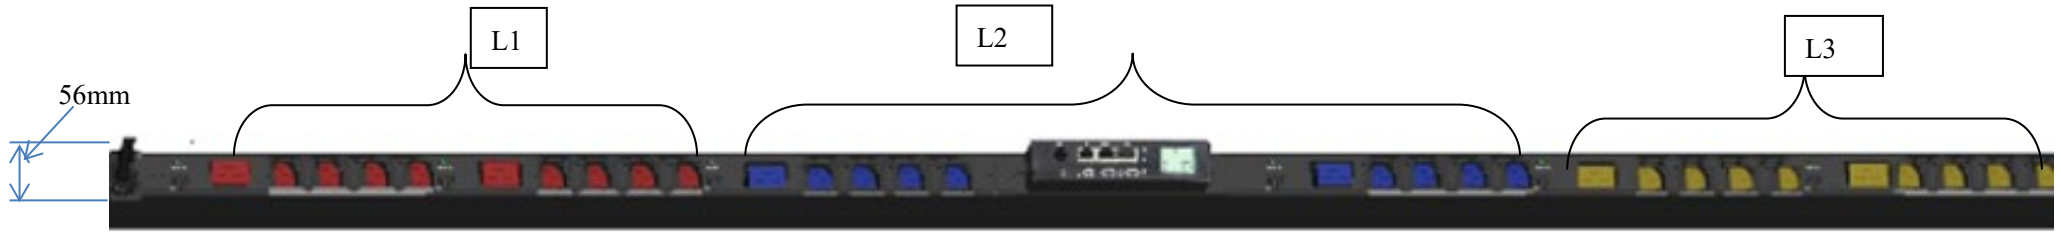

IEC60309 32A (3P+N+E) plug

