




ELPRESS®

Product Datasheet

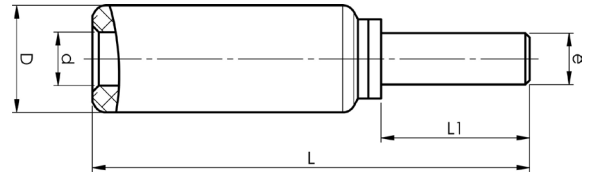

Aluminium-copper pin sockets 16 - 300 mm²

Stranded Al mm ²	Solid Al mm ²	AWG Al (Stranded)	AWG Al (Solid Al)	Name	d (mm)	D	e	L	L1	s	Pcs/pack	Tool
16	25 (16)	6	4	AKP16	5,9	13	6	56	25	29	48	V600, V1300, V250
25	35	4	2	AKP25	6,8	13	6	56	25	29	48	V600, V1300, V250
35	50	2	1/0	AKP35	8,5	20	9	78	25	45	24	V1300, V250
50	70	1/0	2/0	AKP50	9,6	20	9	88	35	45	24	V1300, V250
70	95	2/0	4/0	AKP70	11,3	20	9	88	35	45	24	V1300, V250
95	120	4/0	250	AKP95	12,5	25	12	103	35	60	24	V1300, V250
120	150	250	300	AKP120	14	25	12	108	40	60	24	V1300, V250
150	185	300	350	AKP150	15,8	25	12	108	40	60	24	V1300, V250
185	240	350	500	AKP185	17,6	32	14	113,5	45	60	12	V1300, V250
240		500		AKP240	19,8	32	14	113,5	45	61	12	V1300, V250
300		600		AKP300	22	36	16	142	50	83	9	V250

s = strip length



ELPRESS®