


MJ8-C6A



- ↳ up to 10-Gigabit Ethernet compatible
- ↳ Category 6A compatible
- ↳ RJ45 Shielded connectors
- ↳ Mounted on frame or DIN rail
- ↳ Compliance IEC 61643-21, EN 61643-21


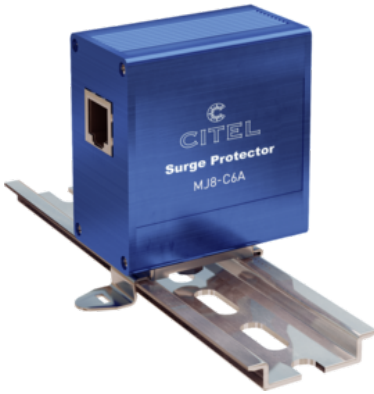


Electrical Characteristics

Network		10Gigabit Ethernet - Cat 6A cabling specification
Nominal line voltage	Un	5 Vdc
Max. DC operating voltage	Uc	8 Vdc
Max. frequency	f max.	500 MHz
Max. data rate		10 Gbps
Protection levelFollowing the test category C3 (IEC61643-21) - Line/Line	Up	20 V
Line/Line Nominal discharge current C2 Category	In L/L	500 A
Line/Ground Nominal discharge current 8 /20µs Test x 10 - C2 Category	In L/PE	2000 A

Mechanical Characteristics

Technology		GDT+Clamping diode
SPD configuration		4 pairs+shielded
Connection to Network		RJ45 shielded connectors Female input/output
Format		Connector RJ45
Mounting		Mounting flange,Screw lug, DIN Rail
Accessory(s) provided		DIN rail adapter, screw, screw nut, earthing plate, countersunk screw, cable shoe
Housing material		Aluminium
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Short-circuit
Disconnection indicator		Transmission interrupt - default mode 2
Pinout		(1-2)(3-6)(4-5)(7-8)
Dimensions		See diagram



G: 3-electrode GDT
DBC: 3-pole Low capacitance diode

Standards

Standards compliance	IEC 61643-21 / EN 61643-21 / UL497B	IEEE 802-3af/3at/3bt/ANSI/TIA-568-C.1
----------------------	-------------------------------------	---------------------------------------

Part number

581540