


DAC50-30-275



- Type 2 AC multipolar surge protector
- In : 20 kA
- I_{max} : 50 kA
- Pluggable module for each phase
- Remote signaling option
- EN 61643-11, IEC 61643-11 compliance
- UL1449 ed.5 certified

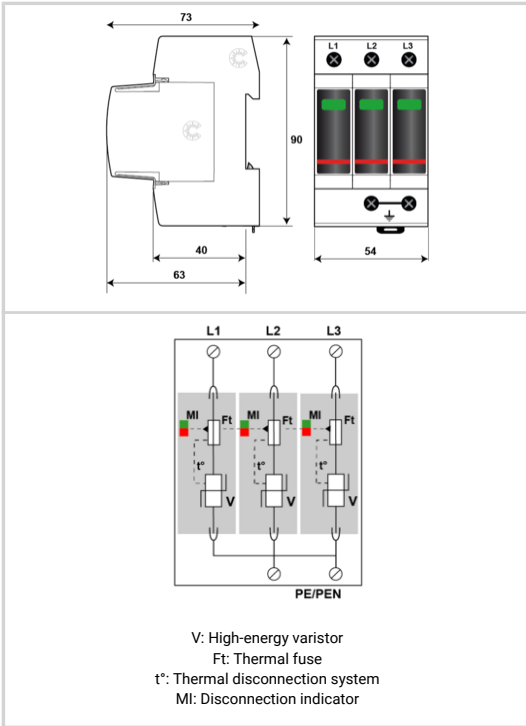

Electrical Characteristics	
SPD type	2
Network	230/400 V 3-phase
AC system	TNC
Max. AC operating voltage	U _c 275 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 580 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 440 Vac disconnection
Residual Current Leakage current to Ground	I _{pe} < 1 mA
Follow current	I _f None
Nominal discharge current 15 x 8/20 μs impulses	I _n 20 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max} 50 kA
Total Maximum discharge current max. total withstand @ 8/20 μs	I _{max} Total 150 kA
Protection mode(s)	L/PE
Protection level L/PE @ I _n (8/20μs)	Up L/PE 1.25 kV
Residual voltage L/PE at 5 kA @ 5 kA (8/20μs)	Up-5kA 1 kV
Admissible short-circuit current	I _{sc} 50 000 A
Mechanical Characteristics	
Technology	MOV
SPD configuration	3-phase
Connection to Network	By screw terminals: 2.5-25mm ² (35mm ² rigid)
Format	Plug-in modular box
Pluggable	Yes
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	T _u -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from AC network
Disconnection indicator	1 mechanical indicator by pole - Red/Green
Spare module(s)	MDAC50-275
Remote signaling of disconnection	option DAC50S-30-275 : output on changeover contact
Dimensions	See diagram - 3 TE (EN43880)
Disconnectors	
Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
Fuses	50 A min. - 125 A max. - Fuses Type gG
Standards	
Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	ÖVE / UL / EAC
Part number	
821110213	